

# Thermodynamic and Thermo-economic Analysis of the Absorption Heat Transformer, Organic Rankine Cycle, and Reverse Osmosis Desalination Combined System

Arash aramesh<sup>1</sup>, Ebrahim Jahanshahi Javaran<sup>1</sup>, Mehran Ameri<sup>2</sup>, Ighball Baniasad Askari<sup>3</sup>

<sup>1</sup> Department of Energy, Institute of Science and High Technology and Environmental Sciences, Graduate University of Advanced Technology, Kerman, Iran

<sup>2</sup> Department of Mechanical Engineering, Faculty of Engineering, Shahid Bahonar University of Kerman, Kerman, Iran

<sup>3</sup> Department of Mechanical Engineering, Faculty of Engineering, University of Zabol, Zabol, Iran

**ABSTRACT:** In this study, the thermodynamic and thermo-economic analysis of an Absorption Heat Transformer, Organic Rankine Cycle and Reverse Osmosis desalination combined system was performed aiming at generation the electricity and fresh water from low temperature heat sources. All analyses are based on the thermodynamic and thermo-economic laws. The results have shown that the Absorption Heat Transformer with the Coefficient of Performance of 0.4372 produces 494.7 kW of thermal energy at temperature of 105°C in the absorber. By applying the Absorption Heat Transformer produced thermal energy, it is possible to produce 63.18 kW of electricity in the Organic Rankine Cycle. By using this amount of electricity in the Reverse Osmosis system, 216.2m<sup>3</sup>/day of freshwater is produced at the cost of 2.217\$/m<sup>3</sup>. Also, in thermo-economic analysis, the unit cost of the exergy for all points of the system and the unit cost of the electricity and fresh water were calculated. The Levelized Cost of Electricity at different heat rates was determined and it was shown that the Levelized Cost of Electricity is reduced when the heat rate is increased. Also, the effects of capital cost of each system and real interest rate changes on the unit cost of the fresh water were studied.

**KEYWORDS:** Absorption heat transformer, Rankine cycle, Reverse osmosis, thermoeconomic analysis

## 1- Introduction

The decreasing of the average total annual rainfall and over consuming the underground water resources especially in the dry, hot and desert regions has resulted in water shortage and scarcity in the country. Seawater desalination is one way to solve this problem using thermal and electrical energy[1]. On the other hand, a portion of energy in various industries, which has low quality and temperature ranges between 60°C and 90°C, is wasted to the environment. The AHT system is capable of increasing the wasted energy temperature with the heat loss recovery of about 50 % [2]. Also, the ORC is capable of producing electricity from these upgraded sources[3]. RO is a technology for producing freshwater that uses the electricity [4]. In Absorption Heat Transformer, Organic Rankine cycle and Reverse Osmosis combined system, by applying the ORC electricity in the RO system it is possible to produce fresh water. Based on bibliographic review, many studies have been carried out on the thermodynamic and thermoeconomic analysis of each system, but it's clear that there are not theoretical works on thermoeconomic evaluation of the AHT/ORC/RO combined system. This study

aimed to investigate the production of fresh water using the low temperatures heat sources from the thermoeconomic point of views.

## 2- Methodology

Fig.1 shows the schematic of Absorption Heat Transformer, Organic Rankine Cycle and Reverse Osmosis combined system. The low temperature heat source is applied to AHT to upgrade its temperature. Then, the upgraded heat supplied to the ORC in order to generate the electricity in the ORC turbine. Eventually, the fresh water is produced by consuming the generated electricity in the RO system.

## 3- Governing Equations

The following assumptions are made for simplification: a) the analysis is carried out under steady state conditions, b) heat losses and pressure drops in the tubing and the components are considered negligible and c) the pressure and temperature of the reference environment for the analyses is 1atm and 20°C, respectively. The first and second laws of thermodynamics, which are made in terms of mass, energy, and exergy balances, are used in the present study[5, 6].

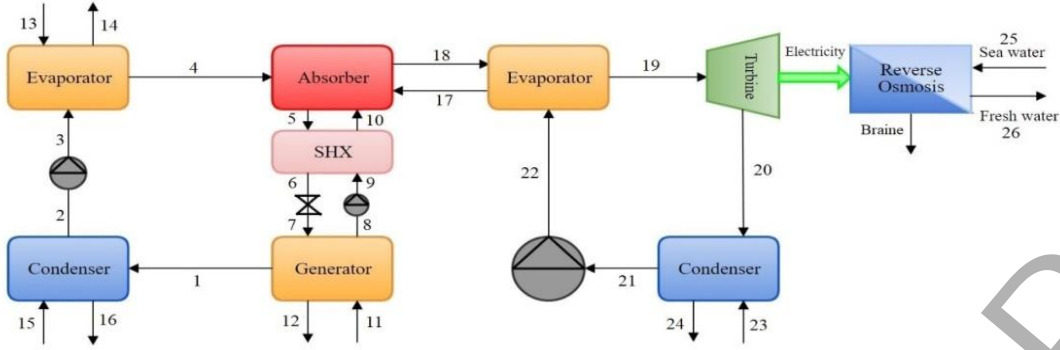


Fig.1. Schematic of the Absorption Heat Transformer, Organic Rankine cycle and Reverse Osmosis combined system

$$\sum (\dot{m}_{in})_k - \sum (\dot{m}_{out})_k = 0 \quad (1)$$

$$\sum \dot{m}_{in} \dot{X}_{in} = \sum \dot{m}_{out} \dot{X}_{out} \quad (2)$$

$$\sum \dot{Q}_k - \sum \dot{W}_k + \sum (\dot{m}h)_{out,k} - \sum (\dot{m}h)_{in,k} = 0 \quad (3)$$

$$EX_D = (\sum E\dot{x}_{in})_k - (\sum E\dot{x}_{out})_k - \dot{W}_k + \dot{Q}_k (1 - \frac{T_0}{T_k}) \quad (4)$$

For each inlet or outlet streams, the thermo-economic equation can be rewritten as follows[7]:

$$\sum_{in} \dot{C}_{in,k} + \dot{C}_{Q,k} + \dot{Z}_k = \sum_{out} \dot{C}_{out,k} + \dot{C}_{W,k} \quad (5)$$

$$\dot{C} = cE\dot{x} \quad (6)$$

Using the above formulations, each component of the system is analyzed and finally the amount of generated electricity and produced fresh water as well as their unit costs are achieved.

#### 4- Results and Discussion

At the first, for the AHT system the heat rates of each components and the unit exergy cost of each stream are obtained as it is shown in Table.1. As can be seen in Table.1, the COP and COP<sub>ex</sub> of the AHT are obtained as 0.43 and 0.51, respectively. Finally, by applying the absorber thermal energy in the ORC boiler, the amount of electricity generated by the ORC is determined. The variation of the fresh water production versus the waste heat rate is shown in Fig.2. According to Fig.2, the amount of produced fresh water is increased when the waste heat rate applied to AHT system is increased. As consequence, with increasing the amounts of fresh water, the levelized cost of fresh water is reduced as can be seen in Fig.3.

Table .1 the AHT and ORC specifications

AHT					
COP	COP <sub>ex</sub>	Q <sub>ab</sub> (kW)	Q <sub>gen</sub> (kW)	Q <sub>ev</sub> (kW)	Q <sub>con</sub> (kW)
0.43	0.51	494.7	523.9	609.4	606.9
ORC					
η <sub>orc</sub> (%)	Q <sub>ev</sub> (kW)	Q <sub>con</sub> (kW)	W <sub>tur</sub> (kW)		
12.6	494	428	63.18		

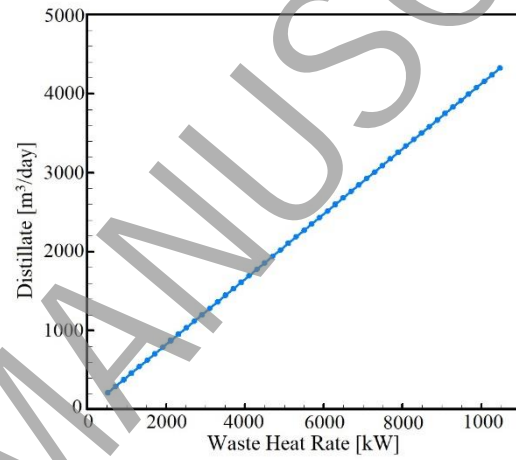


Fig.2. Variations of fresh water amount based on variation of waste heat rate


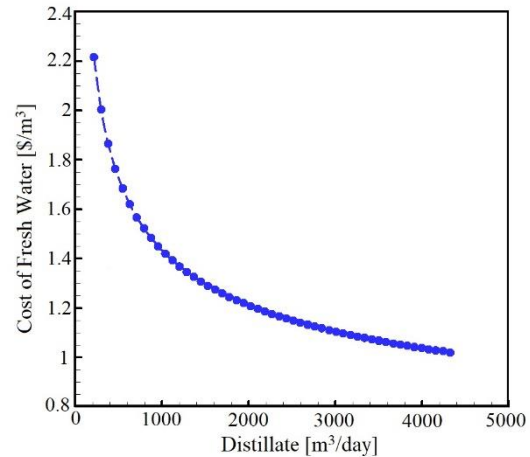


Fig.3. Variations cost of fresh water according to distillate amount

A sensitivity analysis is also performed to investigate the effect of each cost parameters on the unit cost of the fresh water (Fig.4). Based on the results shown in

Fig.4, the unit cost of fresh water is most sensitive to the real interest rate. Also, the ORC, AHT and RO capital costs are respectively, the second, third and fourth cost parameters that affect the unit cost of the fresh water.

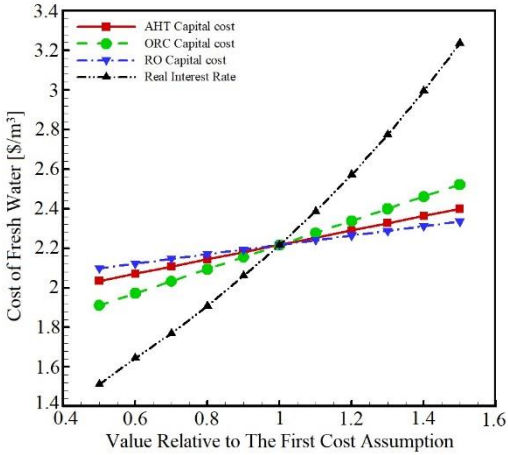

## 5- Conclusions

- Main conclusions of the present study are as follows:
- The AHT system produced 494.4 kW heat with 105°C by achieving COP of 0.4372.
  - The ORC system generated 63.18 kW electricity with the LCE of 0.2843\$/kWh.
  - The RO system produces 216.2 m<sup>3</sup>/day fresh water with unit cost of 2.217 \$/m<sup>3</sup>.
  - With increment waste heat rate, the electricity generation rate and consequently the amount of fresh water are increased.

## References

- [1] G. Srinivas, S. Sekar, R. Saravanan, S. Renganarayanan, Studies on a water-based absorption heat transformer for desalination using MED, *Desalination and Water treatment*, 1(1-3) (2009) 75-81.
- [2] Z. Ma, H. Bao, A.P. Roskilly, Performance analysis of ultralow grade waste heat upgrade using absorption heat transformer, *Applied Thermal Engineering*, 101 (2016) 350-361.
- [3] Ö. Kaşka, Energy and exergy analysis of an organic Rankine for power generation from waste heat recovery in steel industry, *Energy Conversion and Management*, 77 (2014) 108-117.
- [4] A. Nafey, M. Sharaf, Combined solar organic Rankine cycle with reverse osmosis desalination process: energy, exergy, and cost evaluations, *Renewable Energy*, 35(11) (2010) 2571-2580.

- [5] S. Sekar, R. Saravanan, Exergetic performance of eco friendly absorption heat transformer for seawater desalination, *International Journal of exergy*, 8(1) (2010) 51-67.
- [6] R. Misra, P. Sahoo, S. Sahoo, A. Gupta, Thermoeconomic optimization of a single effect water/LiBr vapour absorption refrigeration system, *International Journal of Refrigeration*, 26(2) (2003) 158-169.
- [7] A. Bejan, G. Tsatsaronis, M. Moran, *Thermal design and optimization*, John Wiley & Sons, 1996.