



Study of the Flow and Heat Transfer of Pulsed Sinusoidal Impinging Jet at Distances Close To the Concave Surface

S. Rakhsha, M. Rajabi Zargarabadi*, S. Saedodin

Department of Mechanical Engineering, Semnan University, Semnan, Iran

ABSTRACT: The main purpose of this study is to investigate the effect of the pulsating of the inlet jet on the heat transfer rate short distances of the nozzle from the concave surface. For this purpose, three-dimensional simulation of flow and heat transfer of sinusoidal pulsed jets on the concave surface has been performed at distances of 0.5 times of nozzle diameter to 4 and for Reynolds numbers of 7000 and 14000. The results of the numerical simulation are in good agreement with the experimental results of the steady jet. The result shows that the effect of pulsating the flow with the sine function decreases at short distances between the jet and the concave surface. So that at a distance of 4 times of nozzle diameter, pulsating jet leads to a 10% increase in the average Nu, while this value is equal to 5% for a distance of 0.5 times of nozzle diameter. It can be found that pulsating the flow decreases Nu at low frequencies, and then with increasing the frequency of the pulsed jet, the Nu number increases. Furthermore, with increasing the distance between the surface and the inlet jet, the Nu number decreases significantly. This rate of reduction is lower in comparison to the steady jet.

Review History:

Received: Oct. 29, 2021

Revised: Jan. 31, 2021

Accepted: Feb. 25, 2021

Available Online: May, 16, 2021

Keywords:

Sinusoidal pulsed jets

Concave surface

Impinging jet

Heat transfer

Nu number

1- Introduction

Impinging jet is one of the most effective and common methods of increasing heat transfer in widely used industries such as gas turbines, electronic components, dryers, etc. Methods of improving the heat transfer of the impinging jet include changing the nozzle geometry, pulsating the inlet jet, and using non-flat surfaces. Each of these methods has been studied by previous researchers. Pulsed jet impinging has been studied by previous researchers [1-3]. As previous research has shown, the use of non-flat surfaces increases and improves the heat transfer of the impinging jet from the surface. It can be said that the use of a concave surface causes a secondary flow which increases the heat transfer rate on the surface [4, 5].

In this research, the aim is to investigate the flow and heat transfer of a sinusoidal pulsed jet to a concave surface at short distances between the jet and the impinging surface. The effect of pulse inlet jet frequency and Reynolds number at different distances of the jet from the surface on the heat transfer rate is investigated.

2- Numerical Solution

Fig. 1 shows a schematic of the present problem. As shown in the figure circular jet of diameter d is located on the concave surface and the exit distance of the jet from the concave surface is H . The governing equations for solving this

problem are the equations of mass, momentum, and energy. In order to model turbulence terms, two-equation turbulence models are used. And according to the ability to predict the results and their compliance with laboratory results, a model is selected to continue numerical solution in different conditions. Previous research has reported a better ability of the $k-\epsilon$ RNG model than other turbulence models [6-9]. The velocity inlet boundary condition is for the inlet jet, the boundary condition of the wall with a constant flux for the collision surfaces, and the boundary condition of the pressure outlet for the other surfaces.

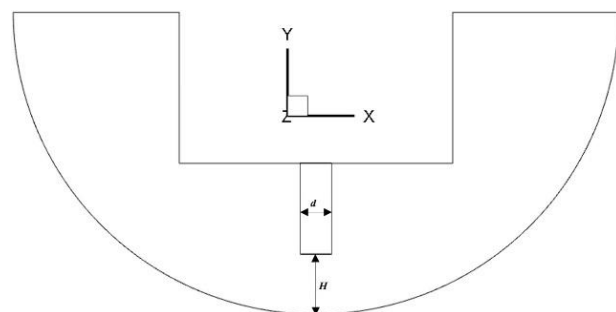


Fig. 1. 2d view of the problem in the x-y plane

*Corresponding author's email: rajabi@semnan.ac.ir



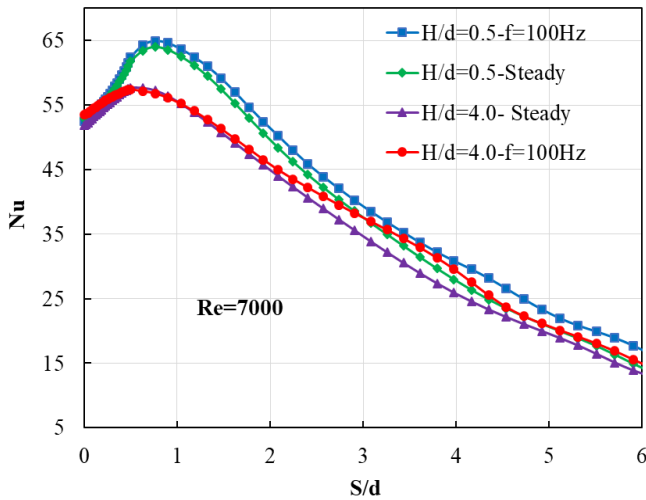


Fig. 2. The effect of pulsating the flow on the Nu distribution for the high and low distances of the jet to the surface

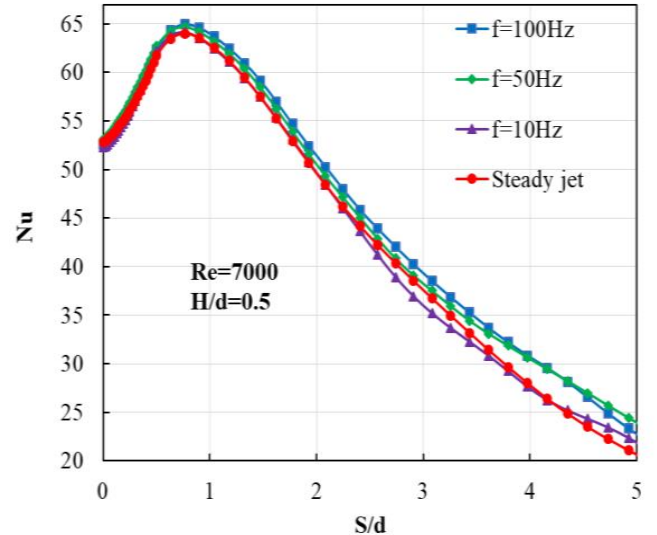


Fig. 3. Effect of pulse frequency of inlet jet on the Nu distribution of concave surface

3- Experiments

The apparatus was designed and manufactured for an impinging jet. The setup consists of main parts including a control box that shows the ambient temperature and air temperature of the inlet jet, temperature sensors, concave surface exposed to constant heat flux, pitot tube, infrared thermal camera pressure sensor, and inlet flow regulating valve. The systematic error of the Nu number is 8%. The uncertainty of calculating the Nu number, including the uncertainty of the measuring equipment and the method of measurement, is a total of about 11.7% [10]

4- Results and Discussion

Fig. 2 shows that as the distance between the jet and the concave surface decreases, the Nu number increases significantly, although this increase reaches its lowest value in the stagnation region and its maximum in the wall jet region. At the end of the impingement surface, the effect of pulsating flow and the distance of the jet from the surface is minimized.

According to Fig. 3, It is observed that pulsating the inlet jet with low frequencies reduces the Nu number in the stagnation zone. By increasing the pulse frequency to 50 Hz, the Nu distribution increases compared to the steady jet mode, and by increasing the frequency to 100 Hz, this trend continues.

In order to investigate the heat transfer from the concave surface, the time and area average of the Nu number on the surface has been calculated and presented in Table 1.

Table 1. the time and area averaged of Nu number at the various distance of jet to surface and frequency of inlet jet

	steady	f =10Hz	f =50Hz	f =100Hz
$H/d=0.5$	31.6	30.4	32.1	34
$H/d=4$	29.2	28.1	30.3	31.7

According to the table, it is observed that by pulsating the flow with a frequency of 10 Hz, the average Nu number on the surface decreases, and by increasing the frequency to 50 Hz and 100 Hz, the average Nu for dimensionless distance 0.5 by 1.2% and 5%, respectively. These values for the dimensionless distance 4 are 4% and 9%, respectively. Therefore, by increasing the distance of the jet from the surface, the effect of pulsating the inlet jet on the average Nu number increases.

5- Conclusion

The summary of the results can be presented as follows:

- The k-ε RNG turbulence model differs less from the experimental data compared to other turbulence models.
- pulsating the jet with sinusoidal function, at long distances of the jet from the surface, has a greater effect on the distribution of Nu number.
- pulsating the jet leads to an increase in the distribution of Nu number in the wall area and its effect is much less in the stagnation zone.
- Increasing the frequency and decreasing the distance of the jet from the surface, increases the average Nu number of the surface. The effect of increasing the frequency is greater at long distances of the jet from the concave surface.

References

- [1] H. Ramezanzadeh, A. Ramiar, M. Yousefifard, M. Ghasemian, Numerical analysis of sinusoidal and step pulse velocity effects on an impinging jet quenching process, Journal of Thermal Analysis and Calorimetry, 140(1) (2020) 331-349.
- [2] M. Haines, I. Taylor, The turbulence modelling of a pulsed impinging jet using LES and a divergence free mass flux corrected turbulent inlet, Journal of Wind Engineering and Industrial Aerodynamics, 188 (2019) 338-364.
- [3] P. Xu, S. Qiu, M. Yu, X. Qiao, A.S. Mujumdar, A study on the heat and mass transfer properties of multiple pulsating

- impinging jets, International Communications in Heat and Mass Transfer, 39(3) (2012) 378-382.
- [4] Y. Zhou, G. Lin, X. Bu, L. Bai, D. Wen, Experimental study of curvature effects on jet impingement heat transfer on concave surfaces, Chinese Journal of Aeronautics, 30(2) (2017) 586-594.
- [5] J. Taghinia, M. Rahman, T. Siikonen, Heat transfer and flow analysis of jet impingement on concave surfaces, Applied Thermal Engineering, 84 (2015) 448-459.
- [6] M. Sharif, K. Mothe, Parametric study of turbulent slot-jet impingement heat transfer from concave cylindrical surfaces, International Journal of Thermal Sciences, 49(2) (2010) 428-442.
- [7] K. Parham, E. Esmacilzadeh, U. Atikol, L. Aldabbagh, A numerical study of turbulent opposed impinging jets issuing from triangular nozzles with different geometries, Heat and Mass Transfer, 47(4) (2011) 427-437.
- [8] H. Liakos, E. Keramida, M. Founti, N. Markatos, Heat and mass transfer study of impinging turbulent premixed flames, Heat and Mass Transfer, 38(4) (2002) 425-432.
- [9] V. Yakhot, S. Orszag, S. Thangam, T. Gatski, C. Speziale, Development of turbulence models for shear flows by a double expansion technique, Physics of Fluids A: Fluid Dynamics, 4(7) (1992) 1510-1520.
- [10] S. Kline, F. McClintock, Describing uncertainties in single-sample experiments, Mech, in, Engng, 1953.

HOW TO CITE THIS ARTICLE

S. Rakhsha, M. Rajabi Zargarabadi, S. Saedodin, Study of the Flow and Heat Transfer of Pulsed Sinusoidal Impinging Jet at Distances Close To the Concave Surface, Amirkabir J. Mech Eng., 53(9) (2021) 1161-1164

DOI: 10.22060/mej.2021.19176.6971



