



Numerical Study of Catalyst Bed Performance of a Monopropellant Thruster Under Influence of Porosity Coefficient

M. R. Salimi, H. Karimaei*, M. Gholampour Yazdi

Aerospace Research Institute, Ministry of Science Research and Technology, Tehran, Iran

ABSTRACT: Hydrazine monopropellant thrusters are commonly used in the situation control and orbital transmission systems of satellites and space crafts. In these thrusters, hydrazine is decomposed into a hot gas product after passing through the catalyst bed during an exothermic reaction. The decomposition chamber of a monopropellant thruster is numerically modeled at the pore scale. Then the effect of catalyst bed porosity coefficient, which is the most important parameter affecting the performance of the decomposition chamber, is investigated. Simulations were performed in two-dimensional axial symmetry as the steady flow in the gas phase. Catalyst granules with an average diameter of 1 mm with three porosity coefficients of 0.4, 0.55, and 0.65 have been considered and the inlet pressure of the decomposition chamber has been considered to 15 bar. The results showed that the porosity coefficient has a very significant effect on the performance of the catalyst bed so that by decreasing this coefficient, the decomposition of hydrazine increases, the bed temperature, and outer wall temperature increase, and the mass flow rate decreases. Reducing the bed porosity coefficient from 0.65 to 0.4 causes about a 40% drop in the bed pressure compared to the initial inlet pressure and also about a 40% reduction in the mass flow rate through the bed. Therefore, the study of this parameter can greatly help the researchers in determining and optimizing the efficiency of the decomposition chamber.

Review History:

Received: Nov. 01, 2021

Revised: May, 08, 2022

Accepted: Jun. 13, 2022

Available Online: Jul. 02, 2022

Keywords:

Hydrazine thruster

Catalyst bed

Decomposition chamber

Porosity coefficient

Pore scale

1- Introduction

In the monopropellant thrusters, the decomposition mechanism is used to release the chemical energy of the propellant. Zhang et al. [1] simulated the evaporation and decomposition of hydrazine using a mixed two-phase model considering a mass transfer. Both homogeneous (gas phase) and heterogeneous (in the presence of a catalyst) reactions are considered in their calculations and the steady-state temperature profile along the decomposition chamber was compared with the experimental data.

In the present paper, the decomposition chamber of a monopropellant hydrazine thruster is numerically modeled at the pore scale. The effect of the catalyst bed porosity coefficient on the performance of the decomposition chamber, with an average granule diameter at a specified inlet pressure, is investigated. Performance parameters of the decomposition chamber are such as mass flow rate, mass fraction of hydrazine, bed loading, bed temperature and outer bed wall temperature, axial velocity of bed flow, pressure changes, and bed pressure drop. In many previous studies, the same method has been used as in the present study, i.e. to change the porosity coefficient of the bed, instead of changing the size of the granules, the distance between them has been changed. Zhou et al. [2] arranged the square particles in two

dimensions and changed the distance between them to change the porosity coefficient. Zhu and Xuan [3] arranged the same spherical granules in three dimensions and, to change the porosity coefficient, changed their distance by changing their arrangement. At the pore scale simulation, no simplified model is included and therefore it has high accuracy.

2- Methodology

The present problem consists of two sections, the first is related to evaporation and gasification of propellant that occurs in the induction zone of the decomposition chamber. In this zone, the simplified energy equation is used according to the research of Shankar et al. [4]. In the second section, after determining the flow properties at the end of the induction zone, the analysis of hydrazine decomposition in the gas phase is performed on the catalyst bed.

Shankar et al. [4] extracted an energy equation for the induction zone and calculated the temperature along it. Note that the length of the induction zone is usually very short and can be ignored relative to the dimensions of the chamber. However, the temperature and mass fraction of the species at the end of this zone have a significant effect on the accuracy of the simulations. After calculating the temperature at the end of the induction zone, the mass fraction of chemical species is also calculated using the following equations [5]:

*Corresponding author's email: karimaei@ari.ac.ir



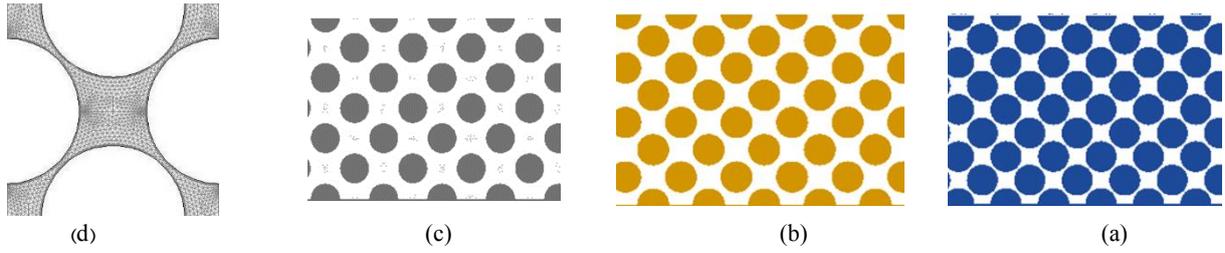


Fig. 1. The geometry of the bed with porosity coefficients of (a) 0.4, (b) 0.55, (c) 0.65, and a granule diameter of 1 mm, and (d) a mesh view of the simulated model created around the catalyst granules

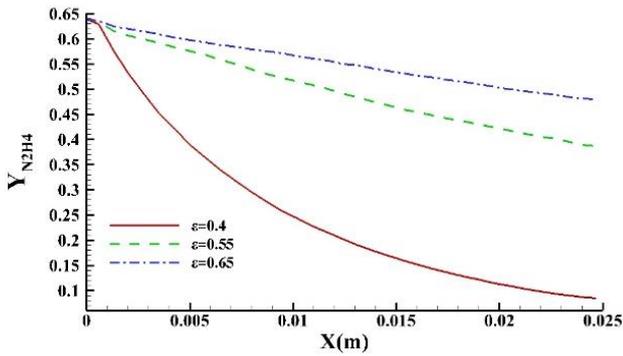


Fig. 2. Mass fraction of hydrazine, with different porosity coefficients

$$Y_g^{N2H4} = 0.87 - 0.0006T_{ind} \quad (1)$$

$$Y_g^{NH3} = \left(\frac{M^{NH3}}{M^{N2H4}} \right) (1 - Y_g^{N2H4}) \quad (2)$$

$$Y_g^{N2} = \left(\frac{M^{N2}}{2M^{N2H4}} \right) (1 - Y_g^{N2H4}) \quad (3)$$

$$Y_g^{H2} = \left(\frac{M^{H2}}{2M^{N2H4}} \right) (1 - Y_g^{N2H4}) \quad (4)$$

After calculating the mass fraction of hydrazine, the mass fraction of other species has been calculated based on the stoichiometric coefficients of the decomposition equations of hydrazine and ammonia. The governing equations for the post-induction zone, along the decomposition chamber, for pressure, temperature, and pore density between catalyst granules can be obtained from the energy, momentum, and mass conservation equations for each species and the state equation for the mixture.

Fig. 1 (a, b, and c) shows the geometry of the studied catalyst bed in three porosity coefficients: 0.4, 0.55, 0.65, and

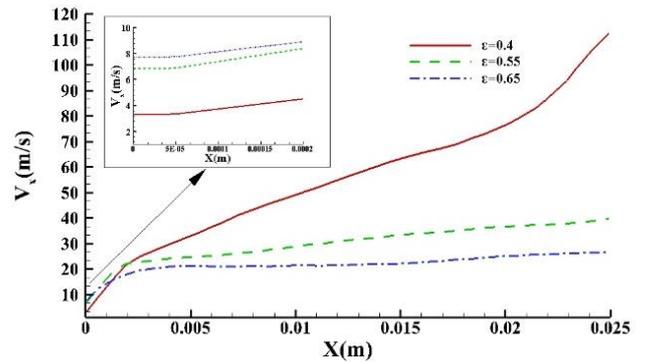


Fig. 3. Axial velocity, with different porosity coefficients

with a granule diameter of 1 mm. The boundary conditions are selected at the inlet as pressure inlet and at the outlet of the nozzle as pressure outlet. In the granule wall, the reaction model has been activated in the software. Fig. 1 (d) shows a view of the computational mesh created around the catalyst granule. Due to the fact that chemical reactions occur in the vicinity of the catalyst surface, the high-density structured mesh is used.

3- Results and Discussion

Fig. 2 shows a quantitative comparison of the mass fraction profiles of hydrazine along the bed. The results show a significant reduction in the mass fraction of hydrazine by reducing the porosity coefficient. It is noteworthy that the rate of hydrazine decomposition reaction in this study is limited to a very thin layer of the catalyst granule wall. Therefore, the rate of chemical reactions, in this case, is much higher than the rate of mass transfer from the fluid flow to the catalyst surface and from the catalyst surface into it. Thus, hydrazine is completely decomposed before penetrating into the catalyst granules.

It should be noted that by decreasing the porosity coefficient, due to the increase in the resistance of the porous medium, the permeability of the bed decreases, which in turn increases the pressure drop. Because catalyst bed granules do as obstacles.

Fig. 3 compares the axial velocity profiles in the bed. The decomposition of hydrazine does not significantly increase

the gas velocity in the catalyst bed. The reason for this is the presence of obstacles (granules) in the porous bed, which prevents a sharp increase in velocity. However, along the bed at a lower porosity coefficient, due to the greater pressure drop, the local velocity increases more. In addition, due to the complete decomposition of hydrazine along the bed and the resulting increase in temperature, the velocity at the end of the nozzle increases more. It is observed that with increasing the porosity coefficient, the velocity at the end of the catalyst bed as well as the end of the nozzle is reduced. Therefore, it is found that assuming the catalyst granule diameter and the inlet pressure are constant, increasing the porosity coefficient, due to the lower temperature of the decomposition chamber, will reduce the axial velocity.

Along the catalyst bed, the local velocity increased more by decreasing the porosity coefficient due to the greater pressure drop. However, the mass flow rate has increased less, which is normal, because when the pressure drop along the catalyst bed increases, consequently less flow will pass through. By increasing the porosity coefficient and thus decreasing the pressure drop, the mass flow has increased more. Therefore, by reducing the porosity coefficient, we can expect thruster consumption to decrease.

4- Conclusions

By reducing the porosity coefficient, the effective contact surface for chemical reactions is increased, which leads to increased hydrazine decomposition, and improves the performance of the catalyst bed. Also, due to the higher temperature in the decomposition chamber, it leads to a

further increase in flow velocity at the end of the catalyst bed. Due to greater pressure drop along the catalyst bed, it also reduces the mass flow.

References

- [1] T. Zhang, G. Li, Y. Yu, J. Chen, M. Wang, Effects of catalytic bed thermal characteristics on liquid monopropellant decomposition and combustion characteristics within an eco-friendly thruster based on ammonium dinitramide. *Combustion Science and Technology*, 188(6) (2016) 910-923.
- [2] L. Zhou, Z.G. Qu, L. Chen, W.Q. Tao, Lattice Boltzmann simulation of gas-solid adsorption processes at pore scale level. *Journal of Computational Physics*, 300(4) (2015) 800-813.
- [3] Q. Zhu, Y. Xuan, Pore scale numerical simulation of heat transfer and flow in porous volumetric solar receivers. *Applied Thermal Engineering*, 120(1) (2017) 150-159.
- [4] V. Shankar, A.K. Ram, K.A. Bhaskaran, Prediction of the Concentration of Hydrazine Decomposition Products Along a Granular Catalytic Bed. *Acta Astronautica*, 11(6) (1984) 287-299.
- [5] CH. Hwang, SN. Lee, SW. Baek, CY. Han, SK. Kim, MJ. Yu, Effects of catalyst bed failure on thermo chemical phenomena for a hydrazine monopropellant thruster using Ir/Al₂O₃ catalysts. *Ind Eng Chem Res.*, 51(15) (2012) 5382-5393.

HOW TO CITE THIS ARTICLE

M. R. Salimi, H. Karimaei, M. Gholampour Yazdi, *Numerical Study of Catalyst Bed Performance of a Monopropellant Thruster Under Influence of Porosity Coefficient*, *Amirkabir J. Mech Eng.*, 54(7) (2022) 329-332.

DOI: 10.22060/mej.2022.20741.7305



