



Study the Fatigue Behavior of AISI 1045 Steel Using Ultrasonic Fatigue Test Machine

S.Amini^{1*}, M.Aghaei¹

¹Mechanical Engineering Department, University of Kashan, Kashan, Iran

ABSTRACT: Fatigue is essential in the use of metals in view of the progress made. In the last two decades, a new branch in the life cycle of fatigue called very high cycle fatigue has received much attention from researchers, with access to this number of cycles (10^7 and above) in practice using modern test devices due to its low frequencies. are time consuming and costly. On the other hand, for many materials, fatigue failure after 10^7 cycles has been reported. Investigating fatigue properties over a very long cycle is a significant issue in ensuring the longevity and reliability of machinery in light of growing industrial demands. To achieve such a number of cycles, a fatigue test machine with a working frequency of about 20,000 Hz is used, which due to its high frequency, time reduction and achieving high cycle is an advantage of this machine. Therefore, in this article, as a new work in the Iran, we design and manufacture an ultrasonic device and then study the fatigue behavior of steel specimens

Review History:

Received: 2016/03/10

Revised: 2016/06/08

Accepted: 2016/10/23

Available Online: 2016/11/09

Keywords:

Fatigue

Very high cycle

Piezoelectric

Ultrasonic

AISI 1045 steel

1- Introduction

Many structural components endure more than 10^7 cycles, but predicting fatigue properties is typically limited to between 10^6 and 10^7 cycles. The life-cycle of turbine engine components is close to 10^{10} cycle. The phenomenon of very high cycle fatigue failure in many alloys is widely considered [1, 2]. Due to these conditions, the researchers tried to develop more accelerated tests that operate at high frequency [3]. Mason's activities in 1950 [4] have important effects on the development of the ultrasonic fatigue test. According to a study conducted to the very high cycle fatigue abroad and the need for very high cycle fatigue testing devices inside the country. In this study, after producing ultrasonic generator, amplifiers instrument and other components, an operating frequency of 20 kHz ultrasonic fatigue test machine was designed and built. Finally, S-N diagram for AISI 1045 steel was established.

2- Methodology

In the ultrasonic fatigue test, external frequencies generated by the test machine should be one of the natural frequencies of the sample. In other words, the natural frequency of the device must be equal to applied frequency, so the geometry of the machine including transducers, horn and specimen need to be designed to achieve the natural frequency equal to the applied frequency of about 20 kHz. Ultrasonic fatigue testing method has some advantages and limitations. Its advantages are Time saving, energy saving, possible testing procedures, and specimen fixture. Its limitations are resonance loading condition, material temperature, load control and low cyclic loads [5].

Up to now, no standard testing methods for ultrasonic fatigue test has been developed. For this reason, laboratories should develop their devices and offer practical design for test methodology but all of them have three part: a power generator that transforms 50 or 60 Hz voltage signal into ultrasonic 20 kHz electrical sinusoidal signals, a piezoelectric transducer excited by the power generator, which transforms the electrical signal into longitudinal ultrasonic waves and mechanical vibration of the same frequency and an ultrasonic horn that amplifies the vibration coming from the transducer in order to obtain the required strain amplitude in the middle section of the specimen. Therefore, these components come together to build a fatigue testing machine and by applying a control condition ability to create ultrasonic fatigue test. As shown schematically in Fig. 1, displacement differs in different parts and design to be done in a way that at the middle of the specimen vibration node to be created and at both end of it anti node to occur thus in its middle, maximum of stress occurs.

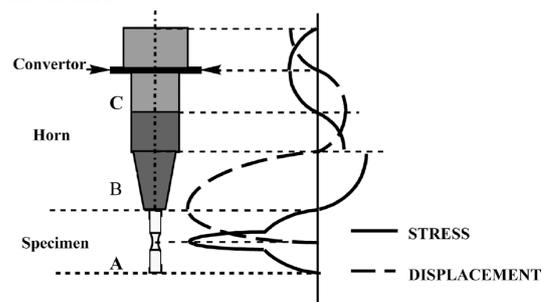


Fig. 1. Displacement and stress distribution [1]

*Corresponding author's email: amini.s@kashanu.ac.ir



Measurement of stress in the middle of the specimen is done by numerical but if the geometry to be power analytical solution can also be presented. Longitudinal wave equation for a specimen with a variable area can be written as follows [2]:

$$\rho S(x) \frac{\partial^2 u}{\partial t^2} = \frac{\partial f}{\partial x} \tag{1}$$

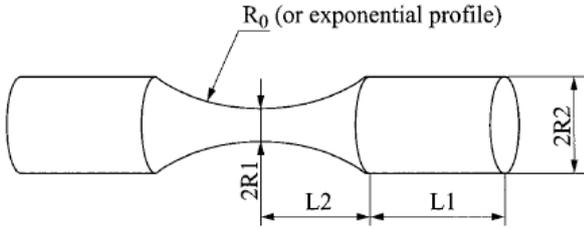


Fig. 2. A schematic of the specimen [1]

The middle section geometry is defined by Eq. (2):

$$\begin{aligned} y(x) &= R_2 \quad L_2 < |x| \leq L \\ y(x) &= R_1 \cosh(\alpha x) \quad |x| \leq L_2 \end{aligned} \tag{2}$$

By applying boundary conditions, the following equations show the displacement, stress, and strain of the specimen.

$$U(x) = A_0 \frac{\cos(L_1 k) \cosh(\alpha L_2) \sinh(\beta x)}{\sinh(\beta L_2) \cosh(\alpha x)}, \quad |x| \leq L_2 \tag{3}$$

$$U(x) = A_0 \cos(k(L-x)), \quad L_2 < |x| < L$$

$$\varepsilon(x,t) = \frac{\partial u(x,t)}{\partial x} \tag{4}$$

$$\sigma(x,t) = E_d \varepsilon(x,t)$$

$$\begin{aligned} \varepsilon(x) &= A_0 \varnothing(L_1, L_2) \\ &= \frac{\beta \cosh(\beta x) \cosh(\alpha x) - \alpha \sinh(\beta x) \sinh(\alpha x)}{\cosh^2(\alpha x)} \\ \sigma(x) &= E_d A_0 \varnothing(L_1, L_2) \\ &= \frac{[\beta \cosh(\beta x) \cosh(\alpha x) - \alpha \sinh(\beta x) \sinh(\alpha x)]}{\cosh^2(\alpha x)} \end{aligned} \tag{5}$$

After testing the assembled machine and initial tests, it showed some desirable performance. Specimens made of AISI 1045 steel were produced and their dimensions were achieved using software and modal analysis.

3- Results and Discussion

To achieve the S-N diagram staircase method was used that in case of failure stress amplitude decreases and if the sample does not break the amplitude increases. Finally in Fig. 3 the S-N diagram related to this steel has been shown through ultrasonic fatigue test. Samples were loaded up to 10⁸ cycles and were considered as out of the test sample, if the samples in this range do not break.

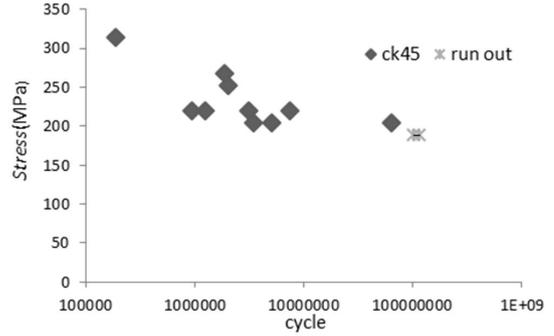


Fig. 3. S-N diagram

Fig. 4 shows a middle section of the specimen view that magnified by VMM. There is a point that by crack initiation and its growth, resonant frequency changes.



Fig. 4. Cracks grown in a sample that has been photographed with VMM

At Fig. 5, an example of Fish-eye effect can be seen at the cross section of the specimen



Fig. 5. An example of the failure started from the surface and its fish-eye

4- Conclusion

In this research, ultrasonic fatigue test machine was introduced, by analyzing the relationship and doing the relevant tests the following results have been obtained:

- The use of ultrasonic fatigue test reduces the time, due to its high frequency
- Due to time-reduction requirement in order to achieve a number of specific cycles reaching over 10⁷ cycles at the time much less than the past is possible.
- Reducing the diameter of the middle part causes larger applied stress.
- Increasing curvature in the middle part causes larger applied stress.
- Fatigue strength of AISI 1045 reduced to 204 MPa.

5- References

- [1] Bathias, C., Paris, P.C., 2004. Gigacycle Fatigue in Mechanical Practice. Section 7, Marcel Dekker.
- [2] Bathias, C., Pineau, A., 2010. Fatigue of materials and structures. in Great Britain and the United States: ISTE Ltd and John Wiley & Sons, Inc.
- [3] Nicholas, T., 2006. high cycle fatigue a mechanics of material respective, section 2&3, Elsevier Ltd.
- [4] Manson, W.P., 1956. Piezoelectric Crystals and their Application in Ultrasonics. New York: Van Nostrand,
- [5] Mayer, H., 1999. "Fatigue crack growth and threshold measurements at very high frequencies". International Materials Reviews, Vol. 44, No. 1, pp. 1-34,

