



## A Developed Geometry for Endplate for Uniform Contact Pressure Distribution on the Polymer Exchange Membrane Fuel Cells Active Area

M. M. Barzegari<sup>1\*</sup>, M. Habibnia<sup>2</sup>, M. Momenifar<sup>1</sup>, M. Ghadimi<sup>1</sup>, K. Mohammadi<sup>1</sup>

<sup>1</sup> Department of Mechanical Engineering, Malek Ashtar University of Technology, Tehran, Iran

<sup>2</sup> Department of Mechanical Engineering, Azad Islamic University of Jouybar, Jouybar, Iran

**ABSTRACT:** The contact resistance between polymer exchange membrane fuel cell components has a crucial effect on cell performance. The geometry of the endplate, on the other hand, plays an essential role in the contact pressure distribution on the membrane electrode assembly and the amount of contact resistance between plates. In this paper, the effect of endplate geometry on the contact pressure distribution over the membrane electrode assembly is simulated using ABAQUS software. In the next part, a new geometry for the endplate is provided and compared to flat endplates. Geometrical parameters of an endplate with curvature (bomb-shaped endplate) are considered, and the effects of these parameters on the contact pressure distribution over the membrane electrode assembly are investigated. In this simulation, a 3D model of the fuel cell is developed. Our simulation results show good performances for the designed endplate and uniform contact pressure distribution on the fuel cell active area. Finally, a single fuel cell was manufactured and assembled using the simulation parameters, and experimental tests are conducted using pressure films to verify the design.

### Review History:

Received: 2019/01/24

Revised: 2019/07/10

Accepted: 2019/09/02

Available Online: 2019/10/23

### Keywords:

Geometry of endplate  
Contact pressure distribution  
Membrane electrode assembly  
Finite element simulation  
Pressure films

### 1- Introduction


Nowadays using renewable energies as a suitable replacement of fossil fuels is one of the main challenging areas for researchers among new energy sources, fuel cells are more attractive compared to other sources. Many research works are devoted to investigating the effects of design and assembly parameters on the contact pressure distribution in recent years. Wang et al. [1] performed an experimental study on clamping pressure distribution in Polymer Exchange Membrane Fuel Cell (PEMFCs) using hydraulic assembly. Alizadeh et al. [2] examined the effects of thickness and material of the endplate, hardness of gasket and number of cells on the pressure distribution. Liu et al. [3] optimized the geometry of the endplate in a way that reduced the weight of the fuel cell and also increased the uniformity of contact pressure distribution. Habibnia et al. [4] discussed the design and assembly parameters in PEMFCs and effects of these parameters on the contact pressure distribution over Gas Diffusion Layer (GDL). Alizadeh et al. [5] proposed a novel clamping mechanism and its influence on contact pressure distribution over Membrane Electrode Assembly (MEA). In this paper, a new geometry is presented for the endplate of the PEMFCs and compared against flat endplates. In the next step, the geometrical parameters of the presented endplate are analyzed to reach uniform contact pressure. To study the effects of various parameters of endplate on the contact pressure distribution over the active area of the fuel cell,

\*Corresponding author's email: barzegari@mut.ac.ir

3D finite element simulations are conducted on ABAQUS software. Finally, to validate the results, the fuel cell with the optimum parameters of the endplate geometry is assembled, and experimental tests are conducted to analyze the contact pressure distribution using pressure films.

### 2- Methodology

ABAQUS commercial code is used to investigate the contact pressure over the MEA and the electrodes. The geometry of the model is shown in Fig. 1.

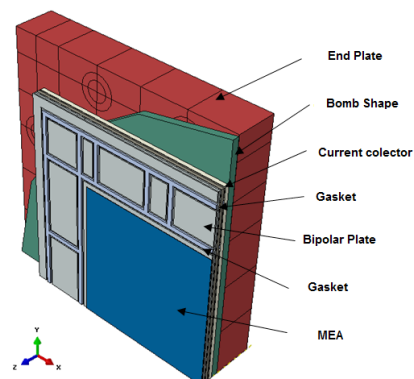

**Fig. 1. The employed single fuel cell stack model**

Due to the symmetry of the fuel cell and for computational cost purposes, the cell is divided into eight parts, and only one



Aluminum endplate with 0.17 mm of curvature (bomb value) and 43 mm of thickness. This geometry results in 1.55 MPa of the mean value of stress and only a deviation of 0.017 MPa from the mean value. Finally, to validate the results of the simulation, a PEMFC was designed and assembled using the optimum geometry of the proposed endplate, and the uniformity of the contact pressure distribution was experimentally shown using pressure measurement films.

## 5- References

- [1] X. Wang, Y. Song, B. Zhang, Experimental study on clamping pressure distribution in PEM fuel cells, *Journal of Power Sources*, 179(1) (2008) 305-309.
- [2] E. Alizadeh, M. Barzegari, M. Momenifar, M. Ghadimi, S. Saadat, Investigation of contact pressure distribution over the active area of PEM fuel cell stack, *International Journal of Hydrogen Energy*, 41(4) (2016) 3062-3071.
- [3] B. Liu, M. Wei, G. Ma, W. Zhang, C. Wu, Stepwise optimization of endplate of fuel cell stack assembled by steel belts, *International Journal of Hydrogen Energy*, 41(4) (2016) 2911-2918.
- [4] M. Habibnia, M. Shakeri, S. Nourouzi, Determination of the effective parameters on the fuel cell efficiency, based on sealing behavior of the system, *International Journal of Hydrogen Energy*, 41(40) (2016) 18147-18156.
- [5] E. Alizadeh, M. Ghadimi, M. Barzegari, M. Momenifar, S. Saadat, Development of contact pressure distribution of PEM fuel cell's MEA using novel clamping mechanism, *Energy*, 131 (2017) 92-97.

