

# Study of the Motion Behavior of Soft Fiber Reinforced Actuators Based on Fiber Angle

Ashkan Fathian, Golbarg Nikaen, Anis Darmohammadi, Hossein Mirzanejad, Mohammad Mahdi Agheli Haji Abadi\*

Department of Mechanical Engineering, Tarbiat Modares University, Tehran, Iran.

## ABSTRACT

The increasing tendency to soft robots in various applications justifies the reason for studying the behavior of such actuators. The present study investigates the effect of fiber angle on motion behavior of elastomeric fiber reinforced actuators with two circular and semicircular sections. Unlike previous researches, this study takes into account the elastomer material used in actuator construction. Furthermore, unlike previous researches in which phase angle variation was studied just in linear actuators, phase angle variation in linear-twisting actuators is also considered. The simulation results showed that the phase change angle is  $54.2^\circ$  in silicone linear actuator and  $30^\circ$  in linear-twisting silicon actuator. The results also showed that the maximum bending in the semi cylindrical bending actuators occurs at a 90-degree angle of twisting fibers. To verify this behavior, experiments were done. Silicone linear actuators were made with four different fiber angles including 30, 54.2, 54.3, 75 and 85 degrees. Moreover, Linear-twisting actuators were made with two different fiber angles including 30, 55, 65 and 85 degrees clockwise and 45 degrees counterclockwise. At last, one bending actuator with fibers at the angle of 88 degrees was made. All these actuators were evaluated after actuation. The experimental results confirmed the simulation results with a maximum calculated error of 14%.

## KEYWORDS

Soft Robot, Soft Actuator, Soft fiber reinforced actuator

---

\* agheli@modares.ac.ir

## 1. Introduction

Soft robotics is a branch of robotics dealing with modeling, designing and fabricating robots which have soft materials and soft actuators in their structure. Among all kind of soft robots, soft pneumatic fiber reinforced actuators are very attractive for scientists as they are light weight, easy fabricated, inexpensive and also inherently safe. All these characteristics, make these soft actuators applicable in rehabilitation field. Pneumatic artificial muscles are a particular type of fiber-reinforced elastomeric actuator that the fiber angle is less than 54.7. The artificial muscles were first employed in 1958 by Gaylord [1]. Colony and e.t showed that by changing the angle of the thread, a wide range of motions could be achieved [2] and also showed that the actuator has extension at angles higher than 54.7 degree and contraction at angles less than 54.7 degree. Polygrinus and et al. investigated the bending actuator of semi-circular cross-section fiber-reinforced and a mathematical model for signifying the relationship between the air pressure and the curvature [3].

Unlike previous studies in which only the phase shift angle of linear actuators was examined, this study also examines the phase shift angle of linear-torsional actuators. For this purpose, the effect of fiber twist angle on the motion of linear, linear-torsional and flexural silicon actuators was investigated. Here, first the motion behavior of actuator was investigated with the help of simulation, then the accuracy of the simulation results was measured with the help of experimental evaluations.

## 2. Methodology

This study was conducted in two main parts including simulation and experiment. In order to simulate actuators behavior during torsion, linear and linear-torsional motions, each of these actuators was first modeled in Abacus. Their body were considered as a cylindrical (for linear and linear-torsional actuators) and semi-cylindrical (for bending actuators) channels and fiber modeled with scripting python in Abacus. For instance, Figure 1 depict the linear motion cylindrical actuator model.

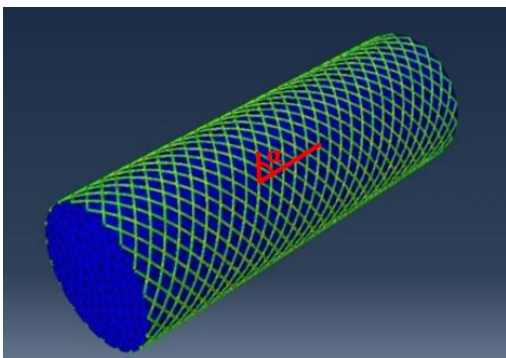


Figure 1. Linear motion cylindrical actuator model

The type of analysis must be nonlinear and quasi-static. But, the excitation speed is low, so the analysis was considered static. For simulation, the body geometry was performed with Table 1 dimensions.

Table 1. Dimension of the actuator

Outer radius	Outer radius	Length actuator
20mm	16mm	60mm


The fiber angle was varied from 0 to 90 degrees. The actuator behavior was then examined. Torsional linear actuators are wrapped only clockwise or counter clockwise. As shown in the figure. In this type of actuator, the fiber angle was also changed from 0-90 degrees. In the bending actuator, the surface of the actuator cross-section is semicircular, and an inextensible layer is placed on the part of its surface. To simulation verifying, several samples were made. The molds were designed with CATIA software. And then it was built with a 3D printer. Silicone with shore 25 was used for molding. And the ratio of silicon to hardener was 5 to 1. To degassing the silicon-hardener mixture, it was placed in a vacuum chamber and then placed in the oven to dry. The presence of a little bubble in the actuator body will cause the actuator to fail when pressurized. After wrapping fiber, the actuator was covered with a second layer of silicon.

## 3. Results and discussion

In this paper, three types of the actuator are investigated. In the first type, the cross-sectional area of the actuators is circular. And the fibers are wrapped bilaterally (clockwise and counterclockwise) around them. The actuators that their fiber angle is higher than 54.2 has an extension, and their fiber angles lower than 54.2 has a contraction. Angle 54.2 is the angle of change of actuator motion. At this angle, the actuator will have no contraction and extension. This angle is obtained in theory 54.7. The difference between the angles in the simulation and the theory is 0.9%. The simulation and experimental results can be seen in Figure 2.

Generally, the non-threaded actuator will increase the length and diameter as the air enters the channel. A cylindrical actuator is twisted at a 0-degree angle. By stimulating the actuator, the fiber force will be higher than the pressure force inside the channel. And the direction of the fiber force is the opposite of increasing the length of the actuator. As the fiber angle increases, the fiber force will not be in line with the actuator


length, so the amount of force that the fiber exerts in the opposite direction will decrease. By decreasing the fiber force, at a specific angle, the fiber force and air pressure will be equal, which the actuator will have no longitudinal change.

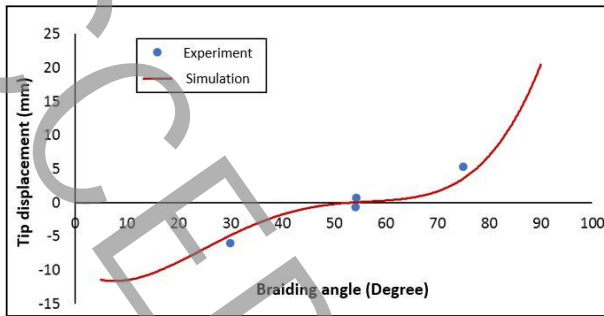

**Figure 2. Comparison of practical results and simulation results for linear actuator at 100 kPa inlet pressure.**

In the second type, the actuator is wrapped only in one direction (clockwise or counterclockwise). Hence it will also have a twisting motion. In this type, in addition to the twisting motion, there is also a change in length. But the angle that the actuator has no change in length is less than that of the first type.


The third type is the semicircular cross-section fiber-reinforced force actuator. This actuator will bend as the air enters the actuator channel. The higher the fiber angle, the higher the bending of motion (Figure 3). The maximum bending motion occurs at the angle of fiber 90 degrees. It is difficult to achieve 90 degrees in fabrication process, so that the bending actuator is fabricated and tested at 88 degrees of fiber angles as shown in Figure 4. On the one hand, several samples with different fiber angles were fabricated and tested to verify the simulation results. The repeatability of the test was also repeated five times. The results of the simulation show that as the cross-section changes (the angle of the fibers and the air pressure is kept constant), the closer to the semicircle it becomes, the higher the bending angle is achieved.

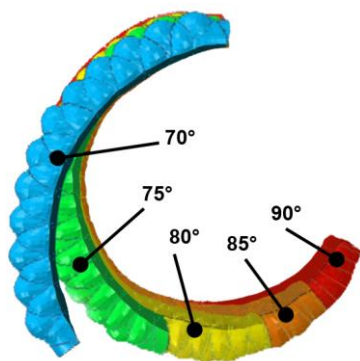

**Figure 3. Influence of the fiber angle on bending motion at constant pressure (70kPa)**

#### 4. Conclusion

Fiber-reinforced soft actuators are very popular due to their unique features such as lightweight, easy fabrication, inherent safety, and low price. These actuators have a high potential for application in a variety of fields such as surgery, rehabilitation, transportation. Therefore, the behavioral study of such actuators seems necessary. In this paper three types of actuator are investigated. In linear actuator that their fiber angle is higher than 54.2 has an extension, and their fiber angles lower than 54.2 has a contraction. In linear-torsional mode, the actuators have extension and contraction but the angle that the actuator has no change in length is less than that of the first type. In bending actuator, the maximum bending motion is at the angle of fiber 90 degrees.

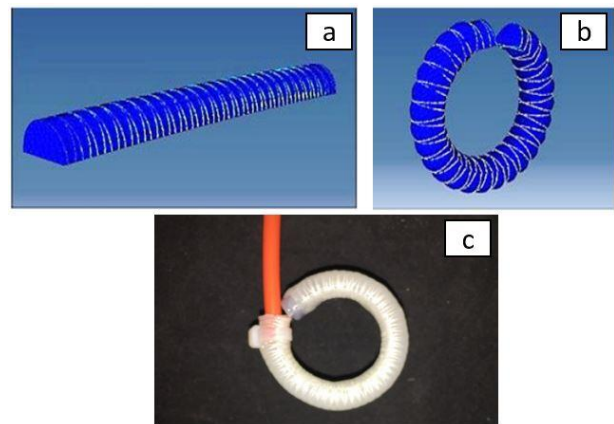

**Figure 4. Semi-cylinder bending actuator with 88-degree fiber angle a) Before applying air pressure. b) After applying 100 kPa air pressure. c) the experimental result and verification**

#### 5. References

- [1] R.H. Gaylord, Fluid actuated motor system and stroking device, in, Google Patents, 1958.
- [2] F. Connolly, P. Polygerinos, C.J. Walsh, K. Bertoldi, Mechanical programming of soft actuators by varying fiber angle, *Soft Robotics*, 2(1) (2015) 26-32.
- [3] P. Polygerinos, Z. Wang, J.T. Overvelde, K.C. Galloway, R.J. Wood, K. Bertoldi, C.J. Walsh, Modeling of soft fiber-reinforced bending actuators, *IEEE Transactions on Robotics*, 31(3) (2015) 778-789.