

Numerical Investigation of Steam Methane Reforming over Ni- and Rh-based Catalysts to Produce Hydrogen, Syngas and Reduce Surface Coverage C(s)

Ali saeedi*, Fatemeh Zangoeei

Department of Mechanical Engineering, University of Birjand

ABSTRACT


Steam Methane Reforming (SMR) has the highest efficiency compared with other hydrogen production ways. Temperature, pressure, steam to methane (S/C) ratio, and catalyst play essential roles in the SMR process. In this paper, a numerical simulation method is performed using Cantera software in Python programming language to produce syngas and hydrogen in the SMR process over Nickel- and Rhodium-based catalysts. The simulation is done in 600-1300K, S/C ratio of 2-4, and pressure of 0.25-4 bars to determine a suitable catalyst and the best range to produce hydrogen and syngas and to reduce Carbone surface coverage. The results demonstrate that the preferred ranges for hydrogen production over Nickel and Rhodium are temperature between 1000 to 1100K, pressure 1 to 2 bars, and S/C ratio 2.5 to 3 and 3 to 3.5 for each, respectively. The appropriate ranges to produce syngas over Nickel and Rhodium are temperature 1200-1300K and 1100-1300K, S/C ratio 2.5-3 and 3-3.5, respectively, and the pressure is suggested between 1-2 bars. However, Rhodium in the same condition is more active than Nickel, while the surface coverage formation is lower over Nickel than Rhodium. Therefore, Nickel is proposed to produce hydrogen via Steam Methane Reforming.

KEYWORDS

Hydrogen Production, Steam Methane Reforming, Numerical Simulation, Catalysts.

1. Introduction

Hydrogen is a clean energy resource that is suggested instead of fossil fuels. At present, steam methane reforming is one of the most developed and cost-effective methods of hydrogen production from fossil fuels on an industrial scale [1]. The steam methane reforming process includes a set of methane reforming reactions (1), (2) and water gas shift (3) as follows [2]:



Abbas et al. [3] studied the kinetic data of the steam methane reforming process over Nickel catalyst

numerically and experimentally at the pressure of 1 bar and a temperature range of 300-700 °C. The results showed that at high temperature, low pressure and high steam to carbon ratio, the system has high performance for methane conversion and the purity of hydrogen produced. Castillo et al. [4] investigate the steam methane reforming process over Ru/Al₂O₃ catalyst numerically and experimentally at low temperature (573-723 K), high steam to carbon ratio (2.5) and low pressure (0.1-0.2 MPa) conditions. According to their results, the steam methane reforming process is highly active in a temperature range of 573-723 K over the reactor bed, and increasing the steam to carbon ratio causes the reactor bed to be cleaner. Therefore, it improves the reaction at low pressure.

* Corresponding Author: Email: ali.saeedi@birjand.ac.ir

2. Methodology

A numerical solution is performed using Cantera software in the Python programming environment. A plug flow reactor, a series of volumes with axial distribution, can be modelled under steady-state conditions using Cantera. The output state of each reactor will be the input boundary condition of the next well-stirred reactor.

3. Equations

The dynamics of local change of surface coverage of adsorbed species on the surface are expressed by Equation (4).

$$\frac{d\theta_k}{dt} = \frac{s_k \sigma_k}{\Gamma} \quad (4)$$

Arrhenius function is a general form that shows reaction constant is temperature-dependent and can be calculated according to formula (5).

$$k_{f,i} = A_i T^{\beta_i} \exp\left(-\frac{E_i}{RT}\right) \quad (5)$$

In most cases, the reaction constant is calculated according to equation (5); but sometimes, the Arrhenius function change by some surface species. So we have equation (6) [5]:

$$k_{f,i} = A_i T^{\beta_i} \exp\left(-\frac{E_i}{RT}\right) \prod_k 10^{a_{ki} \theta_{ki}} \theta_{ki}^{m_{ki}} \exp\left(-\frac{\epsilon_{ki} \theta_{ki}}{RT}\right) \quad (6)$$

4. Discussion and Results

Fig. 1 shows the hydrogen mole fraction at the reactor outlet in the temperature range of 600-1300 K for different steam to carbon ratios of 2-4 at atmospheric pressure over the Nickel catalyst. The highest amount of hydrogen production is related to steam to carbon ratio equal to 2, and the lowest occurs in steam to carbon ratio of 4; the appropriate range for hydrogen production is more than 1000 K.

Fig. 2 shows the hydrogen mole fraction at the reactor outlet in the temperature range of 600-1300 K for different steam to carbon ratios of 2-4 at atmospheric pressure over Rhodium catalyst. The highest amount of hydrogen production is related to steam to carbon ratio equal to 2, and the lowest occurs in steam to carbon ratio of 4. The appropriate range for hydrogen production is more than 900 K.

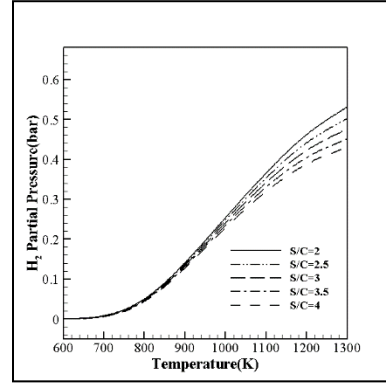


Fig 1: Hydrogen production in temperature range of 600-1300 K and steam to carbon ratio of 2-4 over Nickel based catalyst

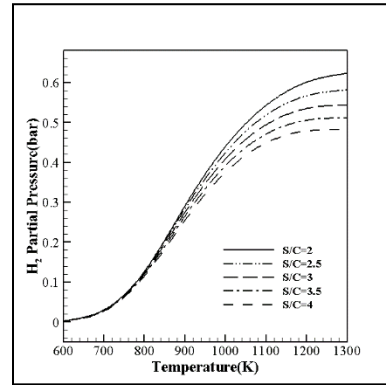


Fig 2: Hydrogen production in temperature range of 600-1300 K and steam to carbon ratio of 2-4 over Rhodium based catalyst

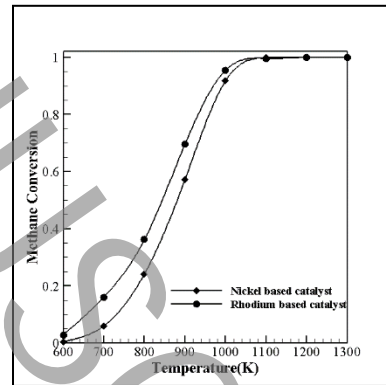


Fig 3: comparison of methane conversion over Nickel and Rhodium based catalysts in temperature range of 600-1300 K and steam to carbon ratio of 3

Fig. 3 shows methane conversion over Nickel and Rhodium catalysts in a temperature range of 600-1300 K and steam to carbon ratio equal to 3 at atmospheric pressure. The activity of the Rhodium catalyst in comparison with the Nickel catalyst is considerable in a

temperature range of 600-800 K, but at 800-1300 K, they behave similarly and closely. Therefore, if it is desirable to carry out the process at a low temperature of 600-800 K, a Rhodium catalyst is recommended. In a temperature range of 800-1300 K, a Nickel catalyst is a good option.

5. Conclusions

The Steam Methane Reforming process over Nickel and Rhodium catalysts was simulated to produce hydrogen and syngas. The important results of this modelling are:

- preferred range for hydrogen production over Nickel and Rhodium catalysts are 1000-1100 K, steam to carbon ratio of 2.5-3 and 3-3.5 and pressure 1-2 bar, respectively.
- appropriate range for syngas production over Nickel and Rhodium catalysts is in the range of 1200-1300 and 1100-1300 K, steam to carbon ratio of 2.5-3 and 3-3.5 and pressure 1-2 bar, respectively.
- The performance of the steam methane reforming process under suitable conditions for both Nickel and Rhodium catalysts are similar; however, the Nickel catalyst is recommended due to its cost-effectiveness and availability.
- Based on methane conversion, Rhodium catalyst is recommended for processing at low temperatures of 600 to 800 K.

6. References

- [1] V. Palma, A. Ricca, E. Meloni, M. Martino, M. Miccio, P. Ciambelli, Experimental and numerical investigations on structured catalysts for methane steam reforming intensification, *Journal of Cleaner Production*, 111 (2016) 217-230.
- [2] B.V.R. Kuncharam, A.G. Dixon, Multi-scale two-dimensional packed bed reactor model for industrial steam methane reforming, *Fuel Processing Technology*, 200 (2020) 106314.
- [3] S.Z. Abbas, V. Dupont, T. Mahmud, Kinetics study and modelling of steam methane reforming process over a NiO/Al₂O₃ catalyst in an adiabatic packed bed reactor, *International Journal of Hydrogen Energy*, 42(5) (2017) 2889-2903.
- [4] J.M. Vásquez Castillo, T. Sato, N. Itoh, Microkinetic Analysis of the Methane Steam Reforming on a Ru-Supported Catalytic Wall Reactor, *Industrial & Engineering Chemistry Research*, 56(31) (2017) 8815-8822.
- [5] R.J. Kee, M.E. Coltrin, P. Glarborg, *Chemically Reacting Flow: Theory and Practice*, Wiley, 2005.